


myPOS Go 2 Printing Dock

technical specifications & features

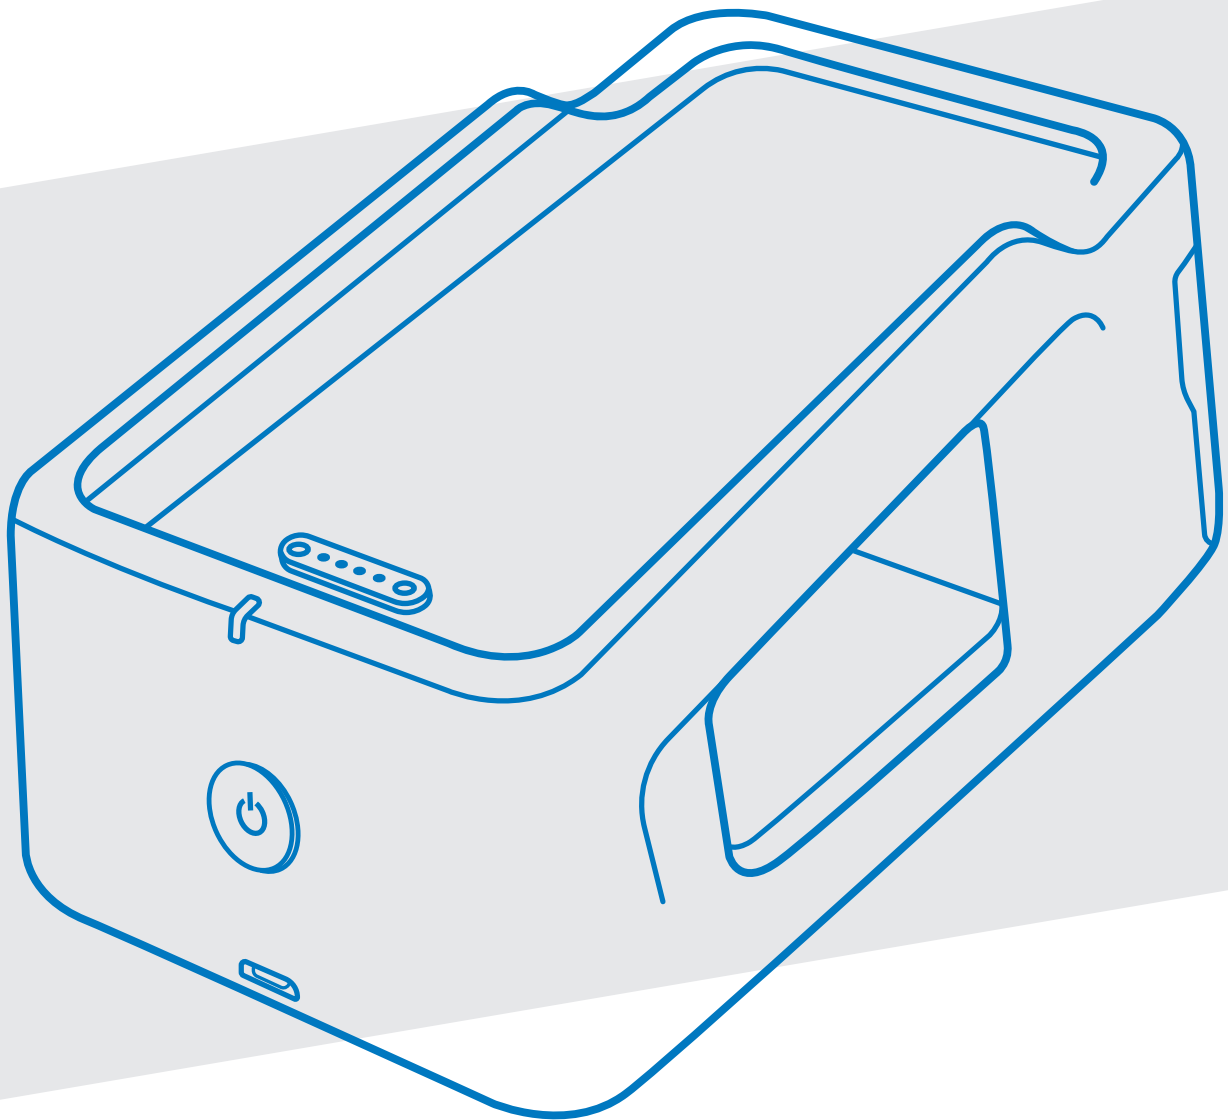

mypos.com

myPOS Go 2 Printing Dock specifications



Battery:

7.4V/2600 mAh



Printer:

High-Speed Thermal Printer
Paper roll w/d/l: 57mm/40mm/17m



Peripheral Ports:

Type-C, 5-Pin Pogo Connector



Power Adapter:

Input: 100~240V 50~60Hz, Output: 5V/1A

*Use the adapter of your myPOS Go 2 device to connect the printing dock to the electrical supply.



Physical:

162.8mmx88.9mmx77.6mm;
420g with battery



Operating Temperature:

0°C to 50°C



Storage Temperature:

-20°C to 70°C



Relative Humidity:

5% to 95% (Non-Condensing)



Certifications:

CE, RoHS

myPOS Go 2 Printing Dock features




Charging station that will charge your myPOS Go 2 device once placed on it



High-speed thermal printer with a compartment for the thermal paper roll



Automatic magnetic alignment making it really easy to connect or disconnect the myPOS Go 2 device

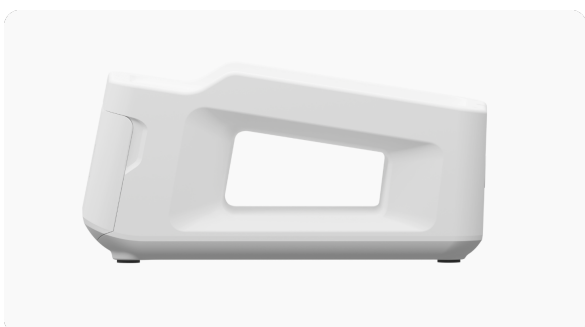

Ergonomic design with a handgrip space to take payments on the go

myPOS Go 2 Printing Dock features



Dual charging of both the internal battery & the card reader once the dock is plugged in



USB port that provides connection of the myPOS Go 2 device to an external master device, e.g. cash register (slave mode)